


Chocolate Forming

One-shot depositor

One-shot depositor models: NGOSD10CV, NGOSD20CV. Each model is shown with its image and technical specifications.

[Custom quote](#)

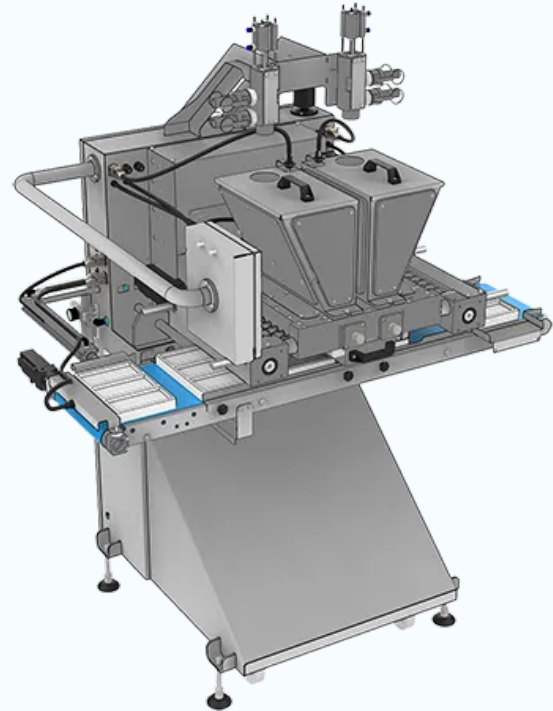


Technical details

Category	Chocolate Forming
Model range	2
Maximum shot weight	500 g/shot.
Total power consumption	4.2 kW, 380 V three-phase.
Model	NGOSD10CV
Material	Food-contact stainless steel

Models and specifications

Chocolate depositor

NGOSD10CV




Role: stand-alone one-shot depositing where combined shell-plus-filling weight is under 500 g per shot. Switch to NGOSD20CV above 500 g/shot; switch to the NGOSD-SV series where per-cavity weight tolerance must be controlled. 380 V three-phase.

Maximum shot weight	500 g/shot.
Total power consumption	4.2 kW, 380 V three-phase.
Model	NGOSD10CV
Material	Food-contact stainless steel

Chocolate depositor

NGOSD20CV

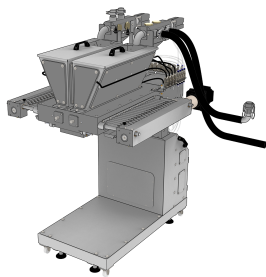

Role: stand-alone one-shot depositing for combined shell-plus-filling weight up to 1000 g per shot. Switch to NGOSD10CV below 500 g/shot to avoid paying for unused chassis and the extra 0.8 kW; switch to the NGOSD-SV series where per-cavity weight tolerance must be controlled. 380 V three-phase.

Maximum shot weight	1000 g/shot.
Total power consumption	5 kW, 380 V three-phase.
Model	NGOSD20CV
Material	Food-contact stainless steel